


ACORN ENGINEERING COMPANY

Acorn Engineering Company continues its 40 year tradition of setting industry standards. Our adherence to strict quality control measures ensures that our customers receive the best plumbing fixtures available.


The Acorn family of products has grown substantially over the years. Our plumbing fixtures can be found in hospitals, schools, correctional facilities, industrial, corporate and sports complexes. We manufacture stainless steel showers, sinks, toilets, lavatories, bedside toilet/lavatory cabinet systems for intensive care units, surgical scrub sinks, washfountains, in addition to our complete line of terrazzo mop sinks and shower bases.

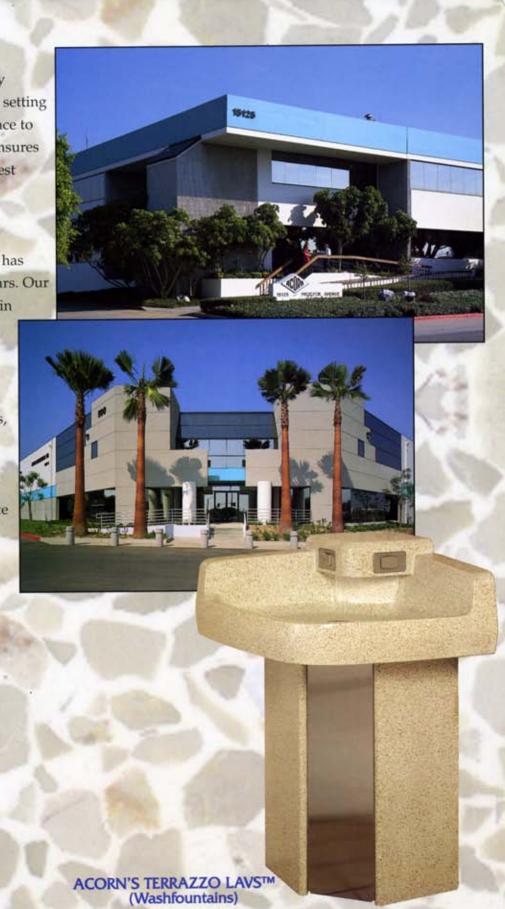

TERRAZZO-WARE™



PALOMINO TAN (Standard)

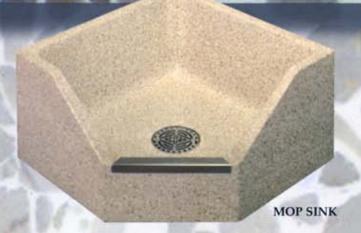


AVAILABLE COLORS:

A corn's line of *Terrazzo-Ware*[™] is joined by two products, each designed to perform specific tasks. The **Mop Sink** is a versatile, easy to maintain sanitation and cleaning station. Terrazzo's natural surface provides years of dependable service. Mop Sinks are available in a variety of sizes, colors and configurations.

The Terrazzo-Ware Shower Base is spacious in design and easy to maintain. Formed with coved corners and pitched floors, Shower Bases are easy to keep clean and sanitary. Terrazzo Shower Bases are offered in several different sizes, colors and configurations, designed to fit the needs of your specific facility, including ADA (Americans With Disabilities Act) compliant facilities.

Acorn selected Terrazzo as the primary construction material for its line of Mop Sinks and Shower Bases because of Terrazzo's unique ability to be attractive, incredibly strong and durable. Both Mop Sinks and Shower Bases are constructed with one-piece, pre-cast Terrazzo composed of marble chips and Portland cement. The Terrazzo surface is then ground smooth and sealed for years of durable service. Mop Sinks and Shower Bases feature coved corners and pitched floors for positive drainage. Acorn offers a full line of options and accessories to complement and complete each installation.



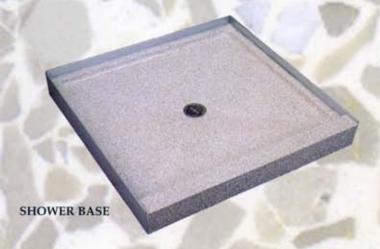

MIDNIGHT ROSE

(Optional)

TERRAZZO-WARE MOP SINKS

Reduced Height Series

TRH-242410 Terrazzo Reduced Height

TRH-363606

Terrazzo Reduced Height (TRH) mop sinks provide attractive cost effective solutions. They come standard with a stainless steel grid strainer and provide for a 3" inside caulk waste pipe connection. A beehive dome strainer is also available.

TRH-362410 Terrazzo Reduced Height

OPTIONS

OPTIONS



-BDS Beehive Dome Strainer

Terrazzo Reduced Height

Standard Height Series

TSH-24

TSH-24 Terrazzo Standard Height

TSH-36-SSC
Terrazzo Standard Height with Stainless Steel Cap

Terrazzo Standard Height (TSH) mop sinks are available in a variety of sizes. These popular 12" high models come standard with a stainless steel grid strainer, a 3" inside caulk drain and plain shoulders which enhances Terrazzo's natural beauty. Also available are custom sizes, colors and a stainless steel cap that provides chip resistance for a longer life.



Stainless Steel



Optional Colors (see page 2)

-CRS
Chemical Resistant Sealant

Tiling Flanges, factory Installed (contact factory)




ACORN ENGINEERING COMPANY



Terrazzo Reduced Height Mop Sinks

MODEL	TYPE		SIZES	DIMENSIO	NS	
NUMBER	ITPE	A - LENGTH	B - WIDTH	C	D	E- HEIGHT
TRH-242410	Square	24" (610mm)	24" (610mm)	=	175	10" (254mm)
TRH-362410	Rectangular	36" (914mm)	24" (610mm)	-	170	10" (254mm)
TRH-242406	Square	24" (610mm)	24" (610mm)			6" (152mm)
TRH-303006	Square	30" (762mm)	30" (762mm)	-	1-1	6" (152mm)
TRH-323206	Square	32" (813mm)	32" (813mm)	-	-	6" (152mm)
TRH-363606	Square	36° (914mm)	36" (914mm)	-	17.0	6* (152mm)
TRH-363606-NC	Neo-Corner	36" (914mm)	36" (914mm)	17" (432mm)	26 ⁷ /s** (683mm)	6" (152mm)
TRH-362406	Rectangular	36" (914mm)	24" (610mm)	-	-	6" (152mm)

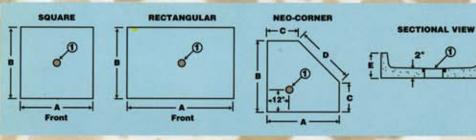


NOTE.

1 Drain, 3" IC (Inside Caulk Outlet), centered in square and rectangular fixtures.

Terrazzo Standard Height Mop Sinks

MODEL	TYPE	SIZES / DIMENSION		
NUMBER	IIIE	A - LENGTH	B - WIDTH	
TSH-24	Square	24" (610mm)	24" (610mm)	
TSH-32	Square	32" (813mm)	32" (813mm)	
TSH-36	Square	36° (914mm)	36° (914mm)	
TSH-3624	Rectangular	36" (914mm)	24" (610mm)	

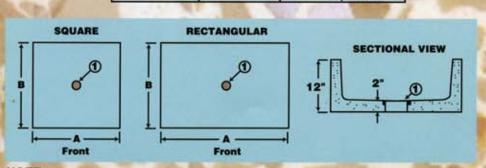

ACCESSORIES



KBGV Bumper Guards, Vinyl KBGS Bumper Guards, Stainless Steel

KFC Faucet, Chrome finish (H&C)





Tiling Flanges, shipped loose (KF24" shown installed)

KWG Stainless steel Wall Guards, shipped loose (KWG2-24" shown)





KMH Mop Hanger with 3 grips on stainless steel wall bracket

KH36 36" Hose with wall hanger





KDG3 & KDG32 Rubber Drain Gaskets for 3" or 2" waste pipe

NOTE:

1 Drain, 3" IC (Inside Caulk Outlet), centered within fixtures.

TERRAZZO-WARE MOP SINKS

Corner Series

Terrazzo Corner Round (TCR) and Terrazzo Neo-Corner (TNC) configurations provide an alternative for those installations where a corner drain requires a flexible fixture. A stainless steel cap on the dropped front of the fixture protects the Terrazzo from chipping. A 3" inside caulk drain and stainless steel grid strainer are also provided. Custom colors are available.



TCR-28 Terrazzo Corner Round



TCR-28"
Terrazzo Corner Round shown with
KWG2-28" double stainless steel
Wall Guard



TNC-24
Terrazzo Neo-Corner shown with
KF24", 2 field installed
tiling Flanges

Drop Front Series

Terrazzo sinks pro stainless dropped from chi drain an strainer strainer.

TDF-24
Terrazzo Drop Front

Terrazzo Drop Front (TDF) mop sinks provide easy front access. A stainless steel cap mounted on the dropped front protects the Terrazzo from chipping. A 3" inside caulk drain and stainless steel grid strainer is also provided.

OPTIONS

-SSC Stainless Steel Cap





-BDS Beehive Dome Strainer

-OC Optional Colors (see page 2)

-CRS

Chemical Resistant Sealant

-TF

Tiling Flanges, factory installed (contact factory)



Terrazzo Corner Series Mop Sinks

MODEL	TVDE	SIZES / DIMENSIONS					
NUMBER	TYPE	A - LENGTH	B - WIDTH	C	D		
TCR-28	Corner Round	28" (711mm)	28" (711mm)	-	-		
TNC-24	Neo-Corner	24" (610mm)	24" (610mm)	15" (381mm)	12 ³/4" (324mm)		
TNC-32	Neo-Corner	32" (813mm)	32° (813mm)	15" (381mm)	24" (611mm)		
TNC-36	Neo-Corner	36" (914mm)	36" (914mm)	17" (432mm)	26 ¹ /4" (683mm)		

ACCESSORIES





KF Tiling Flanges, shipped loose (KF24" shown installed)


KFC Faucet, Chrome finish (H&C)



CORNER







NOTE:

1 Drain, 3" IC (Inside Caulk Outlet)

OPTIONS



-OC Optional Colors (see page 2)

-CRS

Chemical Resistant Sealant

-SH

Standard Height, all five sides are 12" high (TNC models only)



-SSC Stainless Steel Cap (requires -SH option)

-TF

Tiling Flanges, factory installed (contact factory)



KWG Stainless steel Wall Guards, shipped loose (KWG2-24" shown)

KMH Mop Hanger with 3 grips on stainless steel wall

bracket






MODEL	TYPE	SIZES / DIMENSIONS		
NUMBER	ITPE	A - LENGTH	B - WIDTH	
TDF-24	Square	24° (610mm)	24" (610mm)	
TDF-32	Square	32* (813mm)	32" (813mm)	
TDF-36	Square	36" (914mm)	36" (914mm)	
TDF-3624	Rectangular	36" (914mm)	24" (610mm)	




KH36 36" Hose with wall hanger


SQUARE



RECTANGULAR



SECTIONAL VIEW



Rubber Drain Gaskets for 3" or 2" waste pipe



NOTE

1 Drain, 3" IC (Inside Caulk Outlet), centered within fixtures.

Integral Threshold Series

Integral Threshold entrance and two or three flanged sides (-2F, -3F) distinguish this broad line of attractive, spacious and durable Shower Bases offered in Corner (SBC), Square (SBS) and Rectangular (SBR) configurations. The Integral Threshold entrance allows for installation of a shower door. The shower receptacles are provided with a 2" inside caulk drain and pop-out stainless steel grid strainer and are easy to install and maintain. Custom sizes and colors are available.

SBR-4832-3F

Shower Base Rectangular (Shown with 3 sides Flanged and 1 side with an integral threshold)

SBC-36-2F Shower Base Corner

(Shown with 2 sides Flanged and 3 sides with integral thresh-



SBS-36-2F

Shower Base Square (Shown with 2 sides Flanged and 2 sides with integral thresholds)

SBS-36-3F

Shower Base Square (Shown with 3 sides Flanged and 1 side with an integral threshold)

ACCESSORIES



Rubber Drain Gasket for 2" waste pipe

OPTIONS



Vandal Resistant Strainer




Optional Colors (see page 2)












SQUARE B 3 Front, One Sided Threshold





Integral Threshold Shower Bases


MODEL	TYPE	THRESHOLD	FLANGED		SIZES / DIME		
NUMBER	111.5	SIDES	SIDES	A - LENGTH	B - WIDTH	C	D
S8C-32-2F	Corner	3	2	32" (813mm)	(813mm)	14" (356mm)	(648mn
SBC-34-2F	Corner	3	2	34" (864mm)	34" (864mm)	17" (432mm)	24" (610mn
SBC-36-2F	Corner	3	2	36" (914mm)	36" (914mm)	17" (432mm)	26"//" (683mn
SBC-40-2F	Corner	3	2	40° (1016mm)	40° (1016mm)	20* (508mm)	28'/4" (718mr
SBS-30-3F	Square	1	3	30* (762mm)	30* (762mm)	100	*
SBS-32-3F	Square	1	3	32* (813mm)	32* (813mm)	-	
SBS-34-3F	Square	1	3	34" (864mm)	34" (864mm)	-	
SBS-36-3F	Square	1	3	36" (914mm)	36" (914mm)		-
SBS-40-3F	Square	1	3	40" (1016mm)	40" (1016mm)	*	(+)
SBS-42-3F	Square		3	42" (1067mm)	42" (1067mm)	-	12
SBS-48-3F	Square	1	3	48" (1219mm)	48" (1219mm)	-	(*)
SBS-32-2F	Square	2	2	32" (813mm)	32" (813mm)		14
SBS-36-2F	Square	2	2	36" (914mm)	36" (914mm)	25.	-
SBS-40-2F	Square	2	2	40" (1016mm)	40" (1016mm)	124	74
SBR-3632-3F	Rectangular	1	3	36" (914mm)	32" (813mm)	-	- 1.5
SBR-4232-3F	Rectangular	1	3	42" (1067mm)	32" (813mm)	-	- 14
SBR-4234-3F	Rectangular	1	3	42" (1067mm)	34" (864mm)		0.7
SBR-4236-3F	Rectangular	1	3	42" (1067mm)	36" (914mm)	*	-
SBR-4832-3F	Rectangular	1	3	48" (1219mm)	32" (813mm)	-	157
SBR-4834-3F	Rectangular	1	3	48" (1219mm)	34" (864mm)	*	-
SBR-4836-3F	Rectangular	1	3	48" (1219mm)	36" (914mm)	-	-
SBR-5432-3F	Rectangular	1	3	54* (1372mm)	32" (813mm)	-	-
SBR-6032-3F	Rectangular	1	3	60" (1524mm)	32" (813mm)	•	-
SBR-6034-3F	Rectangular	1	3	60" (1524mm)	34" (864mm)	1.71	(#)
SBR-6036-3F	Rectangular	1	3	60" (1524mm)	36" (914mm)	-	12
SBR-3236-3F	Rectangular	î	3	32" (813mm)	36" (914mm)	(*)	100
SBR-3642-3F	Rectangular	1	3	36" (914mm)	42" (1067mm)	-	12



NOTES:

- 1 Flange(s)
- ② Drain, 2" IC (Inside Caulk Outlet), centered within square & rectangular fixtures
- (3) Threshold

Fully Flanged Series



SBS-32-FF
Shower Base Square
(Shown with Fully Flanged sides)

Fully Flanged on all sides, including the entrance (-FF), distinguishes this line of Shower Bases. Offered in Square (SBS), Corner (SBC) or Rectangular (SBR) configurations, the fully flanged design allows for construction of a tiled entrance and tiled walls. Shower receptacles feature a 2" inside caulk drain and a pop-out stainless steel grid strainer. Custom sizes and colors are available.



SBC-36-FF
Shower Base Corner
(Shown with Fully Flanged sides)

Back Outlet Series



Back Outlet (-BO) Shower Bases offered in the Square (SBS) configuration are the perfect solution to rear drainage installations. Drain has a removable stainless steel strainer and a 2" NPT female connection. Back Outlet shower bases are offered as fully flanged (-FF) or with an integral threshold (-3F). Custom sizes and colors are available.

OPTIONS


-VRS Vandal Resistant Strainer





Shower Bases Fully Flanged

MODEL	TVDE	SIZES / DIMENSIONS					
NUMBER	TYPE	A - LENGTH	B - WIDTH	C	D		
SBS-32-FF	Square	32" (813mm)	32* (813mm)	3			
SBS-36-FF	Square	36° (914mm)	36" (914mm)	-21	2		
SBS-40-FF	Square	40° (1016mm)	40" (1016mm)	(4)	=		
SBC-36-FF	Corner	36* (914mm)	36" (914mm)	17" (432mm)	267/4" (683mm)		
SBC-40-FF	Corner	40" (1016mm)	40" (1016mm)	20" (508mm)	28'/4" (718mm)		
SBR-4832-FF	Rectangular	48" (1219mm)	32" (813mm)	170	-		

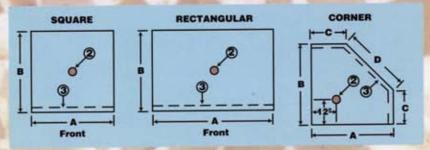

ACCESSORIES



KDG2 Rubber Drain Gasket for 2" waste pipe


OPTIONS




Vandal Resistant **S**trainer



- NOTES:
 1 Flange(s)
- ② Drain, 2" IC (Inside Caulk Outlet), centered within square & rectangular fixtures.
- (3) Entrance




Shower Bases Back Outlet



MODEL	7/05	THRESHOLD	FLANGED	SIZES / DIMENSIONS		
NUMBER	ITE		SIDES	A - LENGTH	B - WIDTH	
SBS-36-B0-FF	Square Fully Ranged	0	4	36" (914mm)	36" (914mm)	
SBS-32-B0-3F	Square Integral Threshold	1	3	32" (813mm)	32" (813mm)	
SBS-36-80-3F	Square Integral Threshold	1	3	36" (914mm)	36" (914mm)	

- NOTES:

 1 Flange(s)
- 2 Drain, 2" female NPT, centered on rear dimension.
- (3) Threshold or entrance



Institutional Series

Shower Bases in the Institutional Series are available in Corner (SBIC), Square (SBIS) and Rectangular (SBIR) configurations. These attractive and durable receptacles feature 6" high by 3" wide shoulders which display Terrazzo's natural beauty. The inside caulked drain comes with a pop-out stainless steel grid strainer which connects to a 2" pipe. Tiling flanges or 1" rabbets for tiled or marble walls are available options. Also available is a double receptacle within a single fixture where each receptacle of this twin unit has its own drain (specify -DD option). Custom colors and sizes are available.

SBIC-36
Shower Base Institutional Corner


Shower Base Institutional Square

SBIS-36-RAB
Shower Base Institutional Square
(Shown with Rabbeted shoulders)



Shower Bases Institutional

MODEL	TVDE	SIZES / DIMENSIONS				
NUMBER	TYPE	A - LENGTH	B - WIDTH	C	D	
SBIC-36	Corner	36" (914mm)	36" (914mm)	17* (432mm)	.26 ¹ /x" (683mm)	
SBIS-36	Square	36" (914mm)	36" (914mm)	14	4	
SBIR-7236	Rectangular	72° (1829mm)	36" (914mm)		-	

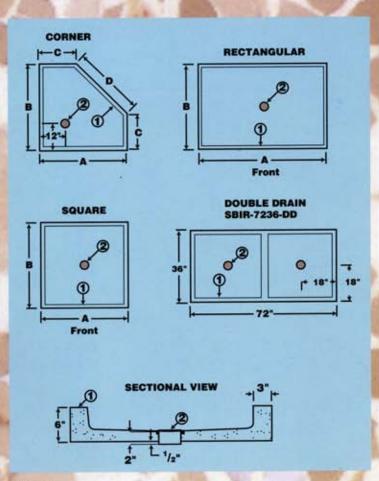

NOTES:

1) Threshold or entrance

Drain, 2" IC (Inside Caulk Outlet), centered within square & rectangular fixtures. Option -BO, Back Outlet drain 2" NPT, centered on rear dimension.

OPTIONS



-BO Back Outlet (on SBIS-36 only, contact factory)



-F Flanges, factory installed (contact factory)



-RAB Rabbeted shoulders (contact factory)



-DD Double Drain (on SBIR-7236 only)



-OC Optional Colors (see page 2)



-VRS Vandal Resistant Strainer

ACCESSORIES



KDG2 Rubber Drain Gasket for 2" waste pipe

Wheelchair Accessible Series

Shower Bases that are Wheelchair Accessible (SBWA) offer an attractive alternative for the physically challenged. The stainless steel ramp provides easy access while keeping water inside the shower receptacle. Shower bases feature a pop-out stainless steel grid strainer with a 2" inside caulk waste pipe connection. A floor drain near the shower entrance is recommended. Flanges on three sides (-3F) of the receptacle allow for tiled or marble wall applications. Custom sizes and colors are also available.



ADA Series



Shower Bases designed for ADA compliant installations (SBADA) provide shower stall flooring as specified in the Americans With Disabilities Act (check your local codes). Shower bases feature a popout, stainless steel grid strainer with a 2" inside caulk waste pipe connection. Flanges on three sides (-3F) of the base allow wall tile to be applied by others to meet ADA required shower stall dimensions. A floor drain near the shower entrance is recommended. Custom colors are available.


SBADA-39-3F Shower Base ADA (Shown with 3 sides Flanged)





Shower Bases Wheelchair Accessible

MODEL	TVDE		SIZES / DIM	ENSIONS	,
NUMBER	TYPE	A - LENGTH	B - WIDTH	C	D
SBWA-36-3F	Square	36" (914mm)	36" (914mm)	18" (457mm)	12" (305mm)
SBWA-48-3F	Square	48" (1219mm)	48" (1219mm)	24" (610mm)	18" (457mm)
SBWA-60-3F	Square	60" (1524mm)	60" (1524mm)	30* (762mm)	24" (610mm)
SBWA-6048-3F	Rectangular	60" (1524mm)	48" (1219mm)	30" (762mm)	18" (457mm)
SBWA-4270-3F	Rectangular	42* (1067mm)	70" (1778mm)	21" (533mm)	9" (229mm)
SBWA-4870-3F	Rectangular	48" (1219mm)	70" (1778mm)	24" (610mm)	9" (229mm)
SBWA-6070-3F	Rectangular	60" (1524mm)	70" (1778mm)	30" (762mm)	9" (229mm)

OPTIONS -VRS Vandal Resistant Strainer -OC Optional Colors (see page 2)







NOTES:

- 1 Flanges. Three flanged shoulders (-3F) are standard
- 2 Drain, 2" IC (Inside Caulk Outlet)
- 3 Stainless steel ramp guard
- 4 Ramp


ACCESSORIES




KDG2 Rubber Drain Gasket for 2" waste pipe

Shower Bases ADA Series

MODEL	TVDF	SIZES / DIMENSIONS						
NUMBER TYPE	A - LENGTH	B - WIDTH	C	D	E	F		
SBADA-39-3F	Square	39" (991mm)	39" (991mm)	19'/z" (495mm)	12" (305mm)	36" (914mm)	37 ¹ /2* (953mm)	
SBADA-6030-3F	Rectangular	60" (1524mm)	30" (762mm)	30" (762mm)	12" (305mm)	57* (1448mm)	281/2** (724mm)	







MOTEC.

- 1 Flanges. Three flanged shoulders (-3F) are standard.
- 2 Drain, 2" IC (Inside Caulk Outlet)
- (3) Shoulder

Acorn also manufactures a line of high quality Terrazzo-Ware™ group washing systems.





ADA Compliant Four Station QUAD-LAV Washfountain



ACORN ENGINEERING COMPANY
P.O. Box 3527 • City of Industry, California 91744-0527 U.S.A.
(800) 488-8999 • (818) 336-4561 • Fax (818) 961-2200